

# Specifications

| MODEL  |  | GS™-3384 RT |                |
|--|--|-------------|----------------|
| MEASUREMENTS   |  | Metric      | US             |
| Working height maximum*                                    |  | 12.10 m     | 39 ft          |
| <b>A</b> Platform height maximum                           |  | 10.10 m     | 33 ft          |
| <b>B</b> Platform length - standard                        |  | 3.89 m      | 12 ft 8 in     |
| outside extended - single deck                             |  | 5.34 m      | 17 ft 6.25 in  |
| outside extended - dual deck                               |  | 6.57 m      | 21 ft 6.5 in   |
| outside extended - super deck                              |  | 7.30 m      | 24 ft          |
| <b>C</b> Slide-out platform extension deck - front         |  | 1.52 m      | 5 ft           |
| <b>D</b> Slide-out platform extension deck - rear          |  | 1.22 m      | 4 ft           |
| <b>E</b> Platform width - outside                          |  | 1.83 m      | 6 ft           |
| Platform height - stowed**                                 |  | 1.55 m      | 5 ft 1 in      |
| <b>F</b> Height - stowed: folding guardrails rails lowered |  | 2.68 m      | 8 ft 9.5 in    |
|  |  | 2 m         | 6 ft 6.75 in   |
| <b>G</b> Length - stowed: single deck                      |  | 3.94 m      | 12 ft 11.25 in |
| dual deck  |  | 3.98 m      | 13 ft 5 in     |
| with outriggers  |  | 4.88 m      | 16 ft          |
| <b>H</b> Width   |  | 2.13 m      | 7 ft           |
| <b>I</b> Wheelbase   |  | 2.84 m      | 9 ft 4 in      |
| <b>J</b> Ground clearance - centre                         |  | 33 cm       | 13 in          |


| PRODUCTIVITY                                   |  |              |              |
|--|--|--------------|--------------|
| Max platform occupancy                         |  | 7            | 7            |
| Lift capacity                                  |  | 1,134 kg     | 2,500 lbs    |
| Drive speed - stowed                           |  | 6.4 km/h     | 4.0 mph      |
| Drive speed - raised                           |  | 1.1 km/h     | 0.7 mph      |
| Gradeability - stowed***                       |  | 50%          | 50%          |
| Maximum outrigger levelling****: front to back |  | 7°           | 7°           |
| side to side                                   |  | 12°          | 12°          |
| Turning radius - inside                        |  | 3.09 m       | 10 ft 1.5 in |
| Turning radius - outside                       |  | 5.94 m       | 19 ft 6 in   |
| Raise/lower speed                              |  | 45/29 sec    | 45/29 sec    |
| Controls                                       |  | proportional | proportional |
| Drive  |  | four wheel   | four wheel   |
| Tyres - foam-filled rough terrain              |  | 25 x 79 cm   | 10 x 31 in   |

| POWER                     |  |  |         |
|---------------------------|--|--|---------|
| Power source              |  | Deutz diesel D2011L03i 49 hp (36 kW), air cooled<br>Ford DSG-423 75 hp petrol/LPG (56 kW) air cooled |         |
| Auxiliary power unit      |  | 12 V DC  | 12 V DC |
| Fuel tank capacity        |  | 113.6 L  | 30 gal  |
| Hydraulic system capacity |  | 113.6 L  | 30 gal  |

| WEIGHT*****                       |     |          |            |
|-----------------------------------|-----|----------|------------|
| Unit weight modifiers for options |     | 5,473 kg | 12,066 lbs |
| Outriggers                        | add | 760 kg   | 1,676 lbs  |
| Dual extension decks              | add | 165 kg   | 364 lbs    |
| Super deck                        | add | 220 kg   | 485 lbs    |
| Generator/Inverter                | add | 48 kg    | 105 lbs    |
| Non-marking tyres                 | add | 432 kg   | 952 lbs    |

CE EN280, PB-10-611-03

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.  
 \*\* Based on RT tyres. Deduct 2 in (5.8 cm) and non-marking.  
 \*\*\* Gradeability applies to driving on slopes. See Operator's Manual for details regarding slope ratings.  
 \*\*\*\* Outriggers are optional  
 \*\*\*\*\* Weight will vary depending on options and/or country standards.

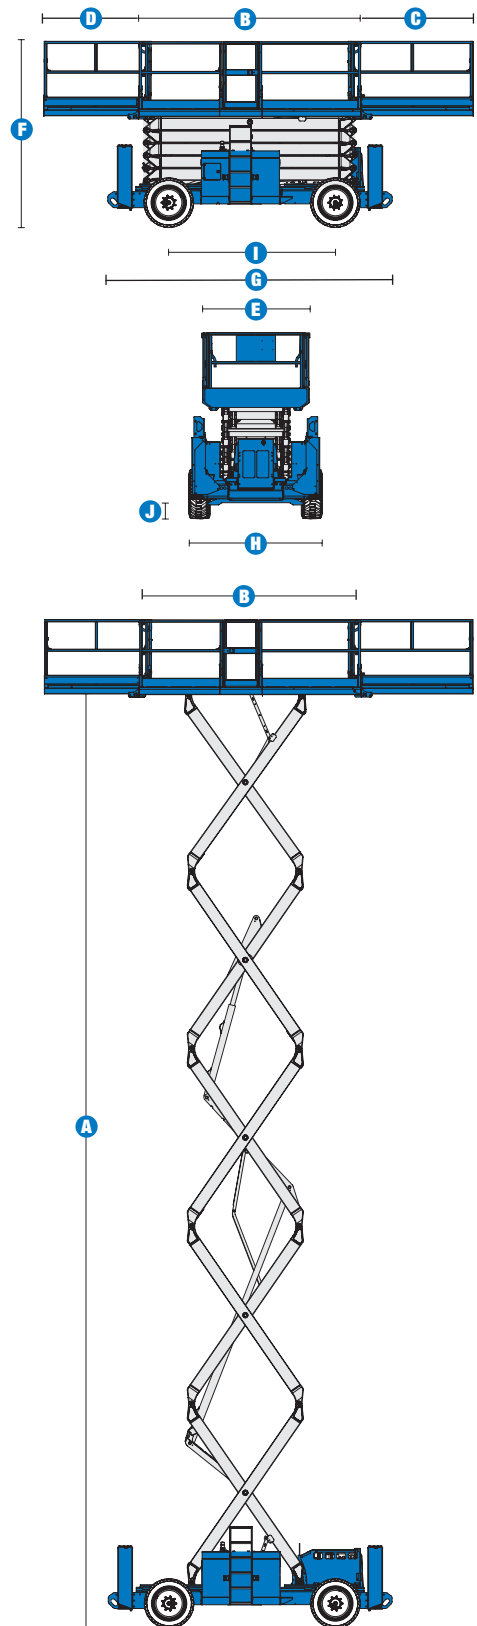

## Features

### STANDARD FEATURES

#### MEASUREMENTS

- 12.06 m (39 ft) working height
- Up to 1,134 kg (2,500 lb) lift capacity

#### PRODUCTIVITY

- 3.94 x 1.83 m (156.5 in x 72 in) steel frame platform
- 1.52 m (60 in) extension deck
- Replaceable aluminium deck
- Folding guardrails
- Proportional lift and drive
- Onboard diagnostic system
- AC power to platform
- Full-height swing gate
- Two self-closing gates
- 4x4
- Positive traction control
- Four-wheel braking
- Slide-out engine tray
- Foam-filled rough terrain tyres
- Tilt level sensor with audible alarm
- Descent alarm
- Horn
- Hour meter
- Certified load sensor

#### POWER

- Deutz diesel 49 hp (36 kW)
- Hydraulic oil cooler



### OPTIONS & ACCESSORIES

#### PRODUCTIVITY

- Dual slide-out platform extension deck package 1.52 m (5 ft) front and 1.22 m (4 ft) rear
- 7.30 m (24 ft) super deck extension package
- Automatic levelling hydraulic outriggers
- Air line to platform
- Non-marking foam filled tyres
- Dual flashing beacons
- Motion alarm
- Platform work lights

#### POWER

- Ford petrol/LPG 75 hp (56 kW)
- 2000 watt generator (110V/60Hz)
- Deutz diesel 49 hp (36 kW)
- Cold start packages for all engines (not CE)
- Diesel scrubber/spark arrestor
- Diesel spark arrestor (without scrubber)
- LPG steel tank only, 37,85 L capacity

#### Enquiries from Europe:

Tel: +31 165 519 361  
Fax: +31 165 511 148  
Email: AWP-InfoEurope@terex.com

#### Offices:

##### France

Tel: +33 (0)2 37 26 09 99  
Fax: +33 (0)2 37 26 09 98

##### Germany

Tel: +49 (0)4221 491 810  
Fax: +49 (0)4221 491 820

##### Spain

Tel: +34 93 572 50 90  
Fax: +34 93 572 50 91

##### Scandinavia

Tel: +46 31 57 51 00  
Fax: +46 31 57 51 04

##### The Netherlands

Tel: +31 165 519 361  
Fax: +31 165 511 148

##### UK

The Maltings  
Wharf Road  
Grantham NG31 6BH  
UK  
Tel: +44 (0)1476 584333  
Fax: +44 (0)1476 584334

##### Middle East

Tel: +971 4 885 8030  
Fax: +971 4 885 6364  
Email: AWP.Infome@terex.com

#### Corporate Headquarters:

##### Genie United States

18340 NE 76th Street  
P.O. Box 97030  
Redmond, WA  
USA 98073-9730  
Tel: +1 425 881-1800  
Fax: +1 425 883-3475

#### Distributed By: